



Comprehensive[®]
Connectivity Company

The Pro's Connectivity Since 1974

CHE-HDBT3010K

Pro AV/IT Integrator Series™ HDBaseT 3.0 HDMI 4K 60Hz 4:4:4 with
USB 2.0, Audio, RS232 Extender Kit up to 330ft



User Manual

VER 1.0

Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

Table of Contents

1. Introduction.....	1
2. Features.....	1
3. Package Contents.....	2
4. Specifications.....	2
5. Operation Controls and Functions.....	4
5.1 Transmitter Panel.....	4
5.2 Receiver Panel.....	6
6. IR Pin Definition.....	7
7. Application Example.....	8

1. Introduction

The Comprehensive CHE-HDBT3010K is an 18Gbps HDBaseT 3.0 Extender, designed to extend uncompressed HD/UHD video and audio signals, RS-232, bi-directional IR, and USB 2.0 signals up to an impressive distance of 328ft / 100m using a single CAT6A/7 cable. With support for video resolutions up to 4K2K@60Hz YUV 4:4:4, this extender ensures exceptional visual clarity and detail.

The Transmitter unit is equipped with HDMI input and audio de-embedding functionality, while the Receiver unit features HDMI output and audio de-embedding capabilities. This allows for seamless integration of audio and video signals into your setup. Additionally, the extender supports bi-directional RS-232 and IR signal pass-through, enabling convenient control of connected devices. With EDID management, it ensures optimal signal compatibility and stability. The USB 2.0 signal transmission capability further enhances versatility for data transfer.

2. Features

- ☆ HDMI 2.0b and HDCP 2.2 compliant
- ☆ Support 18Gbps video bandwidth
- ☆ Support video resolution up to 4K2K@60Hz (YUV 4:4:4)
- ☆ HDR, HDR10, HDR10+, Dolby Vision LLM and HLG pass through
- ☆ LPCM, Dolby Digital/Plus/EX, Dolby True HD, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DSD pass through
- ☆ 4K transmission distance up to 328ft/100m via a single CAT6A/7 cable (HDBT standard mode)
- ☆ 1080P transmission distance up to 492ft/150m via a single CAT6/6A/7 cable (HDBT long reach mode)
- ☆ Support bidirectional POC (Power over Cable), when TX or RX gets power, the other end does not need an external power supply
- ☆ Support 3.5mm analog audio de-embedding at TX and RX
- ☆ EDID management
- ☆ Support bi-directional RS-232 signal pass-through, bi-directional IR signal control, USB2.0 signal transmission
- ☆ Compact design for easy and flexible installation

3. Package Contents

- ① 1 × HDBaseT 3.0 Extender (Transmitter)
- ② 1 × HDBaseT 3.0 Extender (Receiver)
- ③ 1 × IR Blaster Cable (1.5 meters)
- ④ 1 × IR Receiver Cable (1.5 meters)
- ⑤ 2 × 3pin-3.81mm Phoenix Connectors (Male)
- ⑥ 4 × Mounting Ears
- ⑦ 8 × Machine Screws (KM3*4)
- ⑧ 1 × 24V/1A Locking Power Adapter
- ⑨ 1 × User Manual


4. Specifications

Technical	
HDMI Compliance	HDMI 2.0b
HDCP Compliance	HDCP 2.2
Video Bandwidth	18Gbps
Video Resolution	Up to 4K@60Hz
HDR	HDR, HDR10, HDR10+, Dolby Vision, HLG
Color Space	RGB, YCbCr 4:4:4, YCbCr 4:2:2, YCbCr 4:2:0
Color Depth	8/10/12-bit
Audio Formats	LPCM, Dolby Digital/Plus/EX, Dolby True HD, DTS, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DSD
IR Level	12Vp-p
Transmission Distance	HDBT Standard Mode: 4K60 / 100m; 1080P / 100m (CAT6A/7 cable) HDBT Long Reach Mode: 1080P / 150m (CAT6/6A/7 cable)

Connection	
Transmitter	Input: 1 × HDMI IN [Type A, 19-pin female] Outputs: 1 × HDBaseT OUT [RJ45 connector] 1 × L/R OUT [3.5mm Stereo Mini-jack] Controls: 1 × IR IN [3.5mm Stereo Mini-jack] 1 × IR OUT [3.5mm Stereo Mini-jack] 1 × RS-232 [3pin-3.81mm Phoenix jack] 1 × SERVICE [Micro USB, 5-pin female] 1 × USB HOST [USB Type B] 2 × USB DEVICES [USB Type A]
Receiver	Input: 1 × HDBaseT IN [RJ45, 8-pin female] Outputs: 1 × HDMI OUT [Type A, 19-pin female] 1 × L/R OUT [3.5mm Stereo Mini-jack] Controls: 1 × IR IN [3.5mm Stereo Mini-jack] 1 × IR OUT [3.5mm Stereo Mini-jack] 1 × RS-232 [3pin-3.81mm Phoenix jack] 1 × SERVICE [Micro USB, 5-pin female] 2 × USB DEVICES [USB Type A]
Mechanical	
Housing	Metal Enclosure
Color	Black
Dimensions	Transmitter / Receiver: 144mm [W] x 78mm [D] x 23mm [H]
Weight	Transmitter: 323g, Receiver: 319g
Power Supply	Input: AC 100 - 240V 50/60Hz Output: DC 24V/1A (US/EU standard, CE/FCC/UL certified)
Power Consumption	14.28W (POC)
Operating Temperature	32 - 104°F / 0 - 40°C
Storage Temperature	-4 - 140°F / -20 - 60°C
Relative Humidity	20 - 90% RH (no condensation)

5. Operation Controls and Functions


5.1 Transmitter Panel

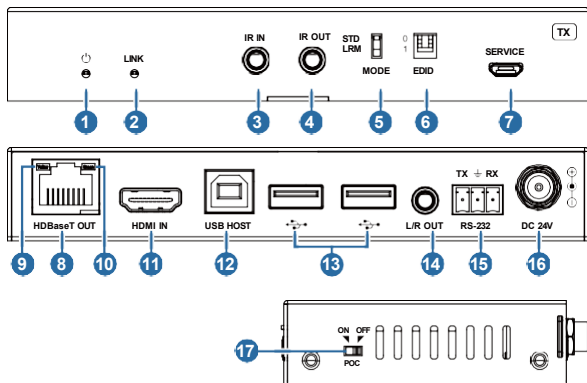

No.	Name	Function Description
1	Power LED	Red LED indicates that the Transmitter is powered on.
2	LINK LED	<ul style="list-style-type: none">Light on: Transmitter and Receiver are in good connection status.Light flashing: Transmitter and Receiver are in poor connection status or connected to the same device.Light off: Transmitter and Receiver are not connected.
3	IR IN	IR signal input port, connected to IR Receiver cable.
4	IR OUT	IR signal output port, connected to IR Blaster cable.
5	MODE switch	Used to switch HDBT mode. Switch to "STD": The HDBT Standard Mode (as factory default) is enabled, it can extend 4K60 signal between the transmitter and the receiver up to 100m via a single CAT6A/7 cable. Switch to "LRM": The HDBT Long Reach Mode is enabled, it can extend 1080p signal between the transmitter and the receiver up to 150m via a single CAT6/6A/7 cable.

6	EDID DIP switch	Used for EDID setting: 00- Copy display's EDID (as factory default) 01- 4K30 4:4:4 10- 1080p60 4:4:4 11- 1200p60 4:4:4
7	SERVICE	Firmware update port.
8	HDBaseT OUT	HDBaseT output port, connected to the HDBaseT IN port of Receiver with a CAT6A/7 cable. It is used for various signals pass-through.
9	Data Signal Indicator (Yellow)	<ul style="list-style-type: none"> ▪ Illuminating: HDMI signal with HDCP. ▪ Flashing: HDMI signal without HDCP. ▪ Dark: No HDMI signal.
10	Link Signal Indicator (Green)	<ul style="list-style-type: none"> ▪ Illuminating: Transmitter and Receiver are in good connection status. ▪ Flashing: Transmitter and Receiver are in poor connection status or connected to the same device. ▪ Dark: Transmitter and Receiver are not connected.
11	HDMI IN	HDMI signal input port, connected to signal source device.
12	USB HOST	USB extension host port, connected to PC.
13	USB DEVICES	Two USB device ports, connected to U disk, mouse or keyboard.
14	L/R OUT	Analog audio output port, used for audio de-embedding output.
15	RS-232	RS-232 serial port, used for serial port command transmission.
16	DC 24V	DC 24V/1A power supply input port. <i>Note that the extender supports POC function, it means that either transmitter or receiver is powered on by 24V/1A power adapter, the other one doesn't need power supply.</i>
17	POC switch	Use the switch to turn on/off POC function.

5.2 Receiver Panel


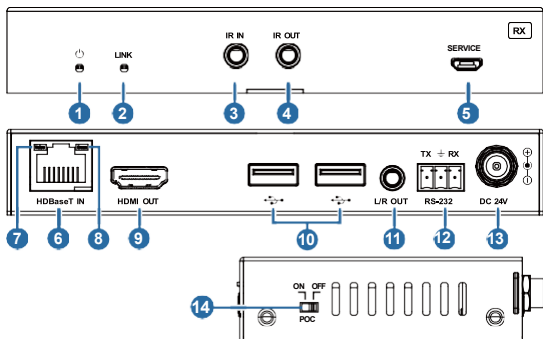


No.	Name	Function Description
1	Power LED	Red LED indicates that the Receiver is powered on.
2	LINK LED	<ul style="list-style-type: none"> Light on: Transmitter and Receiver are in good connection status. Light flashing: Transmitter and Receiver are in poor connection status or connected to the same device. Light off: Transmitter and Receiver are not connected.
3	IR IN	IR signal input port, connected to IR Receiver cable.
4	IR OUT	IR signal output port, connected to IR Blaster cable.
5	SERVICE	Firmware update port.
6	HDBaseT IN	HDBaseT input port, connected to the HDBaseT OUT port of Transmitter with a CAT 6A/7 cable. It is used for various signals pass-through.
7	Data Signal Indicator (Yellow)	<ul style="list-style-type: none"> Illuminating: HDMI signal with HDCP. Flashing: HDMI signal without HDCP. Dark: No HDMI signal.
8	Link Signal Indicator (Green)	<ul style="list-style-type: none"> Illuminating: Transmitter and Receiver are in good connection status. Flashing: Transmitter and Receiver are in poor connection status or connected to the same device. Dark: Transmitter and Receiver are not connected.
9	HDMI OUT	HDMI signal output port, connected to HDMI display device.
10	USB DEVICES	Two USB device ports, connected to U disk, mouse or keyboard.
11	L/R OUT	Analog audio output port, used for audio de-embedding output.
12	RS-232	RS-232 serial port, used for serial port command transmission.

No.	Name	Function Description
13	DC 24V	DC 24V/1A power supply input port. <i>Note that the extender supports POC function, it means that either transmitter or receiver is powered on by 24V/1A power adapter, the other one doesn't need power supply.</i>
14	POC switch	Use the switch to turn on/off POC function.


6. IR Pin Definition

IR Receiver and Blaster pin's definition as below:

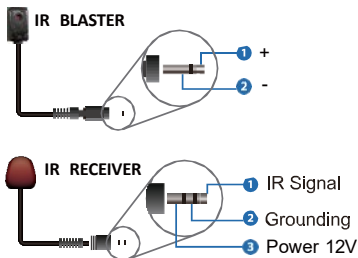

Note: When the angle between the IR receiver and the remote control is $\pm 45^\circ$, the transmission distance is 0-5 meters; when the angle between the IR receiver and the remote control is $\pm 90^\circ$, the transmission distance is 0-8 meters.

7. Application Example

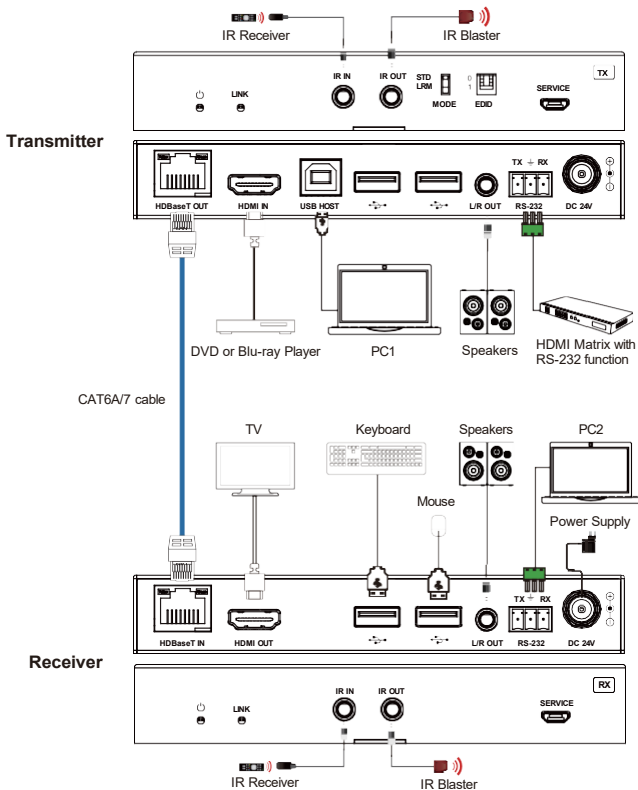

The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.



The Pro's Connectivity Since 1974

80 Little Falls Road, Fairfield, NJ 07004

sales@comprehensiveco.com | 800.526.0242 | www.ComprehensiveCo.com