


## Cat 6 UTP Solid Conductor Bulk Cable

Comprehensive Category 6 500MHz local area network cable utilizes 4 unshielded twisted pairs and solid (or stranded) bare copper 24 awg construction. UL listing NEC,CMR/MPR. Nominal O.D. is 0.25 inches. Meets all requirements as set forth in the Telecommunications Industry Association's standard 568 & 570 recommendations.CM/CMG rated for single floor, general purpose use in walls and ceilings. Verified compliant with EIA/TIA standards by ETL. CSA listed.

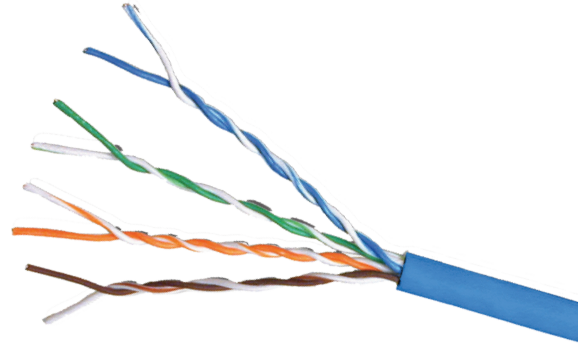

### Features

- 4-pair unshielded twisted pair cable
- Polyethylene separator for enhanced NEXT, ELFEXT and RL Bandwidth
- 24AWG solid bare copper conductors for superior conductivity
- Meets EIA/TIA CAT6 specifications
- Durable, high-density polyethylene insulation, PVC jacket
- Ideal for 10Base-T(IEEE 802.3), 100Base-TX(IEEE 802.3u), 1000Base-TX, 100 Vg-AnyLAN(IEEE 802.12), Token Ring(IEEE 802.5), TP-PMD(ANSI X3T9.5), 350 Mbps CDDI, ATM 155, and all proposed Category 6 requirements for high-speed, full duplex, parallel transmission protocols
- CM/CMG rated for single floor, general purpose use in walls and ceilings
- Verified compliant with EIA/TIA standards by ETL
- CSA listed



### Specifications

Conductors: 4 Twisted Pairs 24 AWG Solid bare copper cable  
 Bandwidth: Supports voice/data/video distribution applications up to 550 MHz  
 Standards: Meets all Cat6 TIA/EIA standards, Verified to EIA/TIA 568B.2  
 Conductor DC Resistance: 9.8 Ohm at 100m maximum

Outer Diameter: 6.2mm  
 UL Rating: CM/CMG  
 Jacket: PVC  
 RoHS Compliant: Yes  
 Warranty: Lifetime

Cat 6 UTP 500MHz		
CAT6B-1000	Solid Blue	1000 ft. Roll
CAT6BLK-1000	Solid Black	1000 ft. Roll
CAT6G-1000	Solid Grey	1000 ft. Roll
CAT6GRN-1000	Solid Green	1000 ft. Roll
CAT6ORA-1000	Solid Orange	1000 ft. Roll
CAT6PUR-1000	Solid Purple	1000 ft. Roll
CAT6RED-1000	Solid Red	1000 ft. Roll
CAT6WHT-1000	Solid White	1000 ft. Roll
CAT6YLW-1000	Solid Yellow	1000 ft. Roll